

Kawasaki Motors Corp – Safety Recall

Makes/Models/Model Years:

KAWASAKI/EX650C9F/2009
KAWASAKI/EX650CAF/2010

Summary:

KAWASAKI IS RECALLING CERTAIN MODEL YEAR 2009 EX650C9F/FL AND MODEL YEAR 2010 EX650CAF/FL NINJA 650 MOTORCYCLES. THE RIGHT REAR PORTION OF THE LOWER COWLING CAN INTERFERE WITH THE OPERATOR'S FOOT WHILE IN THE PROCESS OF APPLYING THE REAR BRAKE.

Consequence:

THIS COULD DIMINISH THE OPERATOR'S CONTROL OVER BRAKE FORCE APPLICATION OR DISTRACT THE OPERATOR, CREATING THE POTENTIAL FOR A CRASH RESULTING IN INJURY OR DEATH.


Remedy:

DEALERS WILL INSTALL AN UPDATED FOOTREST GUARD AND FAIRING BRACKET. THIS SERVICE WILL BE PERFORMED FREE OF CHARGE.

- Install new lower fairing bracket RH (11056-0590) with new bolts (92151-1755).
Torque – lower fairing bracket bolts : 12N · m (1.2kgf · m , 106in · lb)
- Install the lower fairing RH.
Torque – lower fairing mounting bolt (M6): 8.8N · m (0.9kgf · m , 78in · lb)

Guard RH Replacement:

- Remove the bolts [A] and the guard [B].
Scrap old guard.

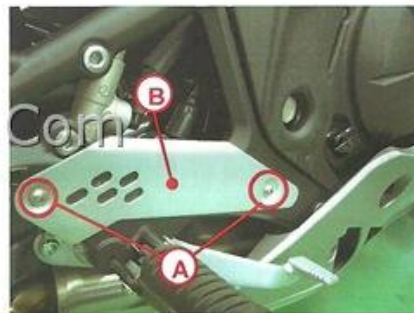

- Install new guard (55020-0597) [A].

